


86 / 225 & 86 / 228

Silicone Gap Pad

Benefits

- Good price performance ratio
- Very soft to compensate mechanical impacts like vibrations
- Elastic behavior
- Also available as a double layer material

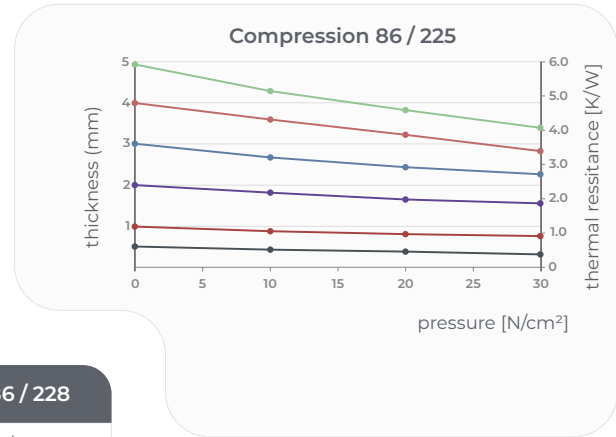

Properties	Unit	86 / 225	86 / 228
Colour		orange	pink / orange
Assembly		single layer, fibre glass reinforcement up to 4.0 mm	double layer carrier film 86/52 in 0.125 mm
Thermal Properties*			
Thermal resistance R_{th}	K/W	1.2	1.2
Thermal conductivity λ	W/mK	2.0	2.0
Electrical Properties**			
Dielectric breakdown voltage $U_{d,AC}$	kV	6.0	6.0
Volume resistivity	Ωm	2.2×10^{11}	2.8×10^{11}
Dielectric loss factor $\tan \delta$		1.0×10^{-3}	1.0×10^{-3}
Dielectric constant ϵ_r		3.6	2.5
Mechanical Properties			
Hardness	Shore 00	30 - 45	30 - 45
Young's modulus	N/cm²	58	160
Physical Properties			
Application temperature	°C	-40 to +180	-40 to +180
Density	g/cm³	1.65	1.95
Total mass loss (TML)	Ma.-%	< 0.44	< 0.44
Flame rating	UL-94	V-0	V-0
Possible thickness	mm	0.5 - 5.0	0.5 - 5.0

* Measured @ thickness 1 mm ** Measured @ thickness 0.5 mm



! At maximum pressure, Gap Pads (SOFTTHERM® Films) should not be compressed beyond 30% of the original thickness. In case the material should be compressed more than 30%, the SOFTTHERM® material may leak out.

Distributed By:
MH&W International Corp
575 Corporate Dr, Ste 4200
Mahwah, NJ 07430
Phone: (201) 891-8800
Email: sales@mhw-intl.com