

# M | CoolBlue®



Permanent Solution



Protect Electronics



No Maintenance




Reduce Downtime



Easy Installation



Bearing Protection

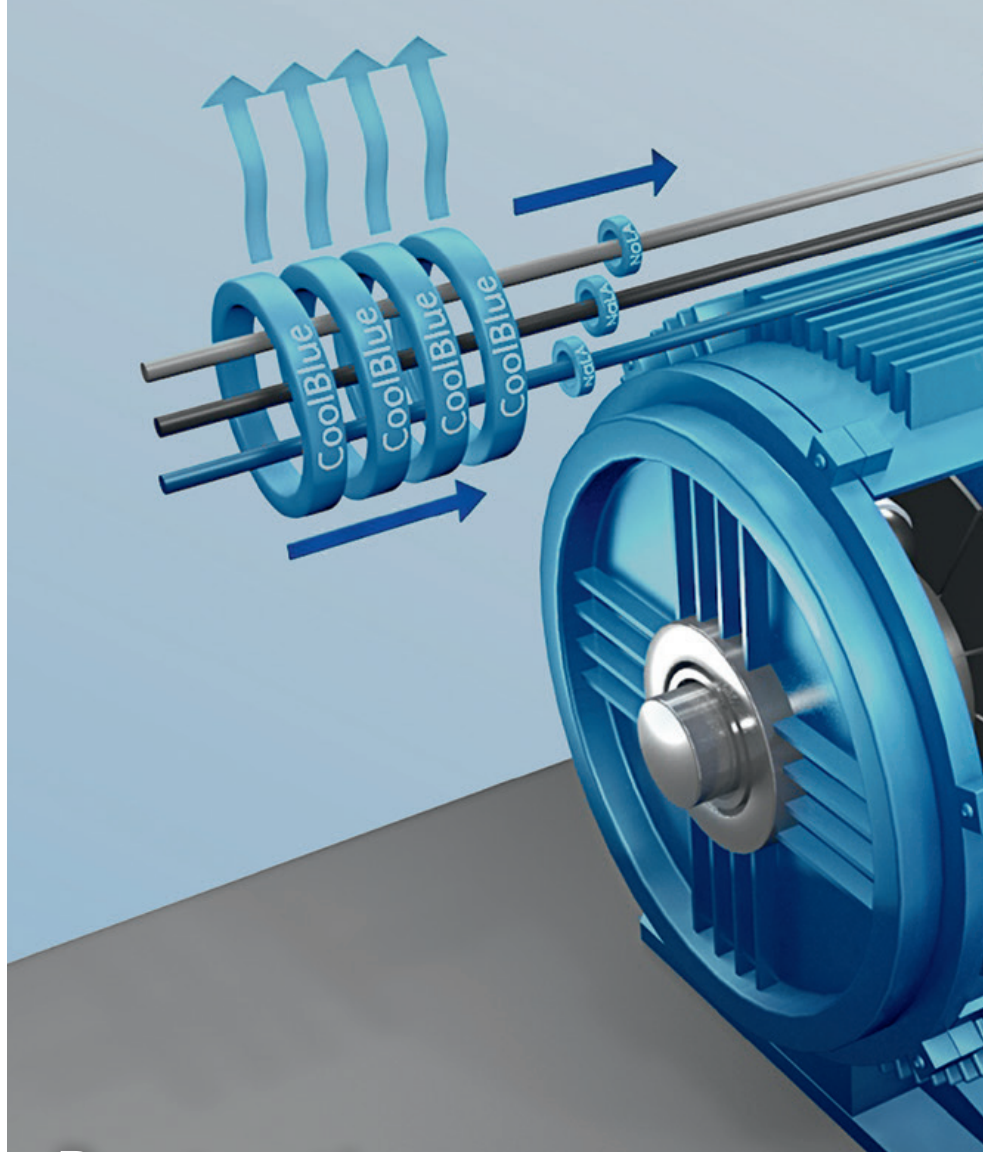



## Selection Guide for CoolBLUE Kits

VFD HP	Cable Length: VFD to Motor			
	0-150'	151'-300'	301'-450'	451'+
0-1 HP	CB-RKIT.0-1HP-150-4C	CB-RKIT.0-1HP-300	CB-RKIT.0-1HP-450	CB-RKIT.0-1HP-451+
1.1-10 HP	CB-OKIT1.1-10HP-150-4C	CB-OKIT1.1-10HP-300	CB-OKIT1.1-10HP-450	CB-OKIT1.1-10HP-451+
11-40 HP	CB-OKIT11-40HP-150	CB-OKIT11-40HP-300	CB-OKIT11-40HP-450	CB-OKIT11-40HP-451+
41-50 HP	CB-OKIT41-50HP-150	CB-OKIT41-50HP-300	CB-OKIT41-50HP-450	CB-OKIT41-50HP-451+
51-100 HP	CB-OKIT51-100HP-150	CB-OKIT51-100HP-300	CB-OKIT51-100HP-450	CB-OKIT51-100HP-451+
101-428 HP	CB-OKIT101-428HP-150	CB-OKIT101-428HP-300	CB-OKIT101-428HP-450	CB-OKIT101-428HP-451+
429-1631 HP	CB-RKIT429-1631HP-150	CB-RKIT429-1631HP-300	CB-RKIT429-1631HP-450	CB-RKIT429-1631HP-451+
1632+ HP	CB-OKIT1632+HP-150	CB-OKIT1632+HP-300	CB-OKIT1632+HP-450	CB-OKIT1632+HP-451+

*Kits are based on one conductor per phase*