



U 80 & U 90 KERATHERM[®] silicone free Thermal Tape

Benefits

- Silicone free (polyurethane)
- Very high thermal performance
- Good ratio between thermal performance and electrical isolation
- Softening effect for an additional increase in heat output
- Non sticky, available with adhesive coating

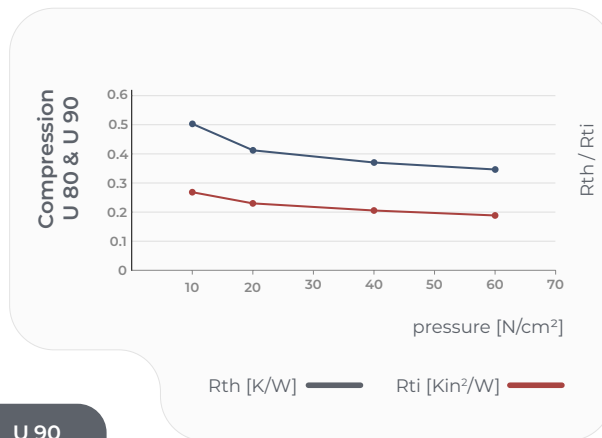

Properties	Unit	U 80	U 90
Colour		blue	light blue
Thermal Properties			
Thermal resistance R_{th}	K/W	0.2*	0.082**
Thermal conductivity λ	W/mK	1.8*	6.0**
Electrical Properties			
Dielectric breakdown voltage $U_{di,AC}$	kV	4.0*	4.0**
Volume resistivity	Ωm	1.4×10^{14} *	2.0×10^{11} **
Dielectric loss factor $\tan \delta$		1.3×10^{-2} *	1.4×10^{-2} **
Dielectric constant ϵ_r		3.2*	3.1**
Mechanical Properties			
Hardness	Shore A	80 - 90	70 - 85
Tensile strength	N/mm ²	3.0	2.0
Elongation	%	130	150
Physical Properties			
Application temperature	°C	-40 to +125	-40 to +125
Density	g/cm ³	2.26	1.46
Flame rating	UL-94	V-0	V-0
Possible thickness	mm	0.15 - 0.3	0.1 - 0.3

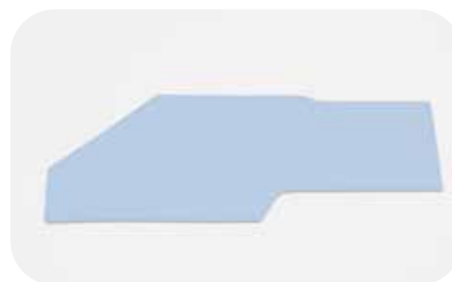

✓ Optional available with adhesive coating U 80K / U 90K

Distributed By:
MH&W International Corp
575 Corporate Dr, Ste 4200
Mahwah, NJ 07430
Phone: (201) 891-8800
Email: sales@mhw-intl.com