


Benefits

- high thermal conductivity
- high electrical isolation
- easy handling
- optional available with adhesive coating

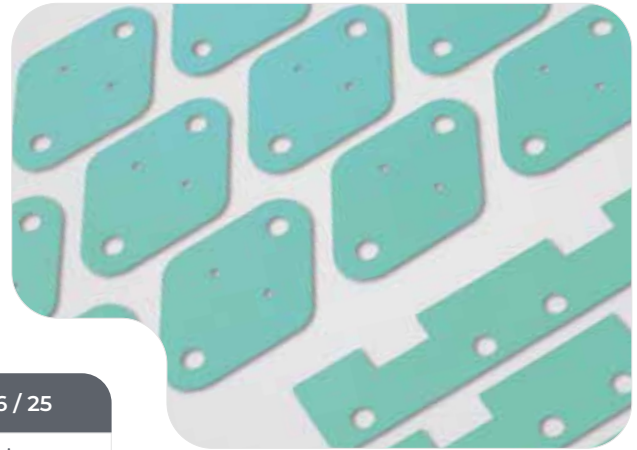

Properties	Unit	86 / 25
Colour		mint
Thermal Properties*		
Thermal resistance R_{th}	K/W	0.225
Thermal conductivity λ	W/mK	2.5
Electrical Properties*		
Dielectric breakdown voltage $U_{d,AC}$	kV	3.5
Volume resistivity	Ωm	$1,5 \times 10^{11}$
Dielectric loss factor $\tan\delta$		8×10^{-3}
Dielectric constant ϵ_r		1,9
Mechanical Properties		
Hardness	Shore A	60 - 75
Tensile strength	N/mm ²	tbd
Elongation	%	tbd
Physical Properties		
Application temperature	°C	-60 to +200
Density	g/cm ³	2.37
Possible thickness	mm	0.225

* Measured @ thickness 0.225 mm

✓ Optional available with onside adhesive coating **86/25K**

Distributed By:
MH&W International Corp
575 Corporate Dr, Ste 4200
Mahwah, NJ 07430
Phone: (201) 891-8800
Email: sales@mhw-intl.com